


## Installation of replacement chip for Samsung CLP-510 or Xerox Phaser 6100



1. Take from the cartridge the OEM chip with the connector

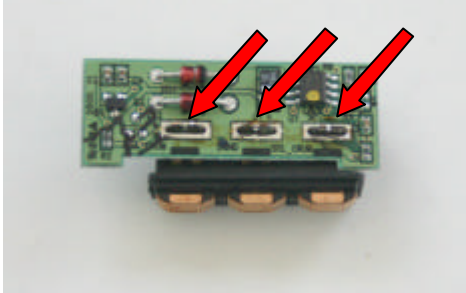


2. Desolder the OEM chip from the connector using our Soldering Kit (code KITSALD)



3. You have to do this operation avoiding any damages to the connector




4. This is the connector clean, without the chip on

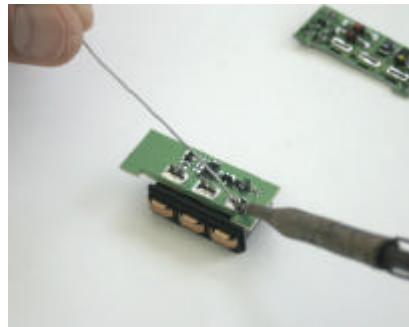

5. Place our chip in the same position as the OEM



6. Weld the new chip using the wire solder included in our Soldering Kit

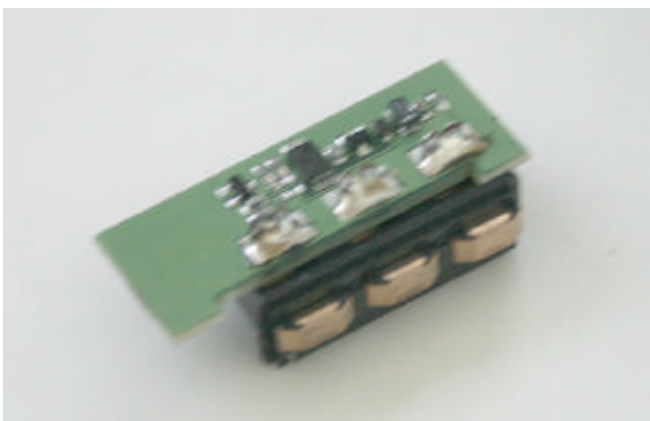

7. The chip is ready to be located in your remanufactured cartridge

*All trademarks and logos are the property of their respective owners and holders*

**NOTE:** With our chip solution you can convert the Xerox cartridge into a Samsung cartridge and vice versa.  
If you Desolder the two resistors from the CLP-500 model, you can convert these into a CLP 510 or Xerox Phaser 6100 cartridge.